


Vibrating Armature Diaphragm Pump

MODEL

106/107

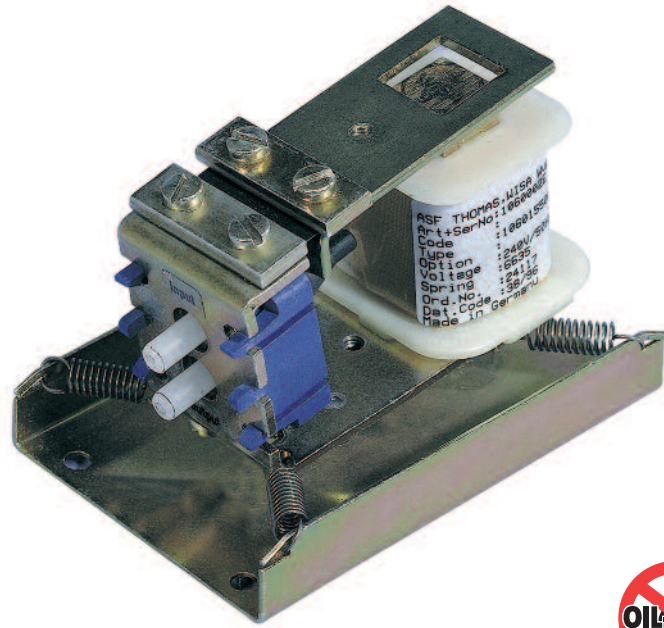

PRODUCT FEATURES

- Long life
- Low noise
- Maintenance free
- Continuous operation
- Natural pressure limitation
- Diaphragm material EPDM
- Low current consumption



TYPICAL APPLICATIONS

- Hygiene, disinfection
- Laboratory and analytical technology
- Medical



Vibrating Armature Diaphragm Pump 106/107

Flow	1,2 l/min
Max. pressure	270 mbar
Max. vacuum	19%

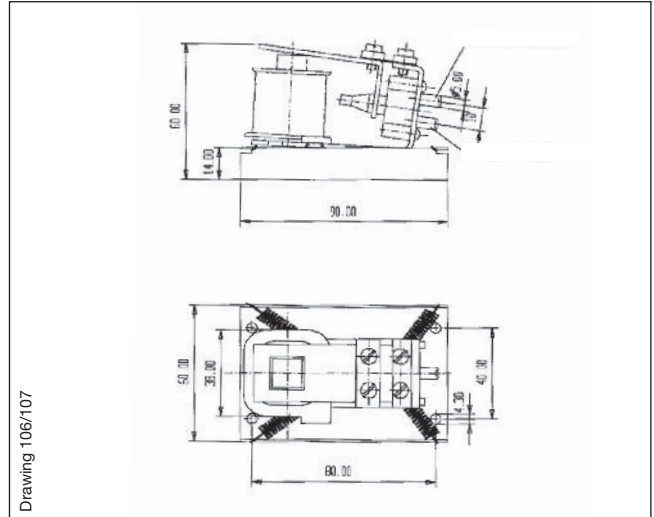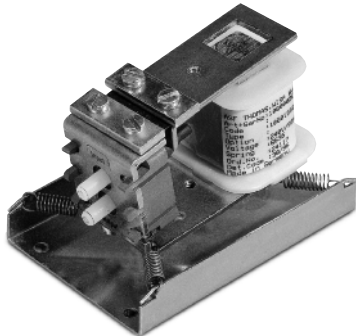

Drawing 106/107


Pneumatic Data			
Description	106 230 V/50 Hz	106 115 V/60 Hz	107 230 V/50 Hz
Part number	1060012	1060014	1070002
Max. flow	0,95 l/min	0,95 l/min	1,2 l/min
Max. pressure	270 mbar	270 mbar	
Operating pressure range	0 to 200 mbar	0 to 200 mbar	
Max. vacuum			19%
Operating vacuum range			0 to 15%

Electrical Data			
Nominal voltage	230 V/50 Hz	115 V/60 Hz	230 V/50 Hz
Max. current consumption	11 mA	30 mA	11 mA

General Data			
Ambient temperature	10 to 50 °C	10 to 50 °C	10 to 50 °C
Weight	0,3 kg	0,3 kg	0,3 kg
Dimensions H x B x L	60 x 60 x 90 mm	60 x 60 x 90 mm	60 x 60 x 90 mm
Average noise level ¹	38 dB(A)	38 dB(A)	38 dB(A)
Diaphragm material	EPDM	EPDM	EPDM

¹At free flow, with inlet/outlet tubing.
All listed values are measured at standard atmospheric conditions.

Flow Curves

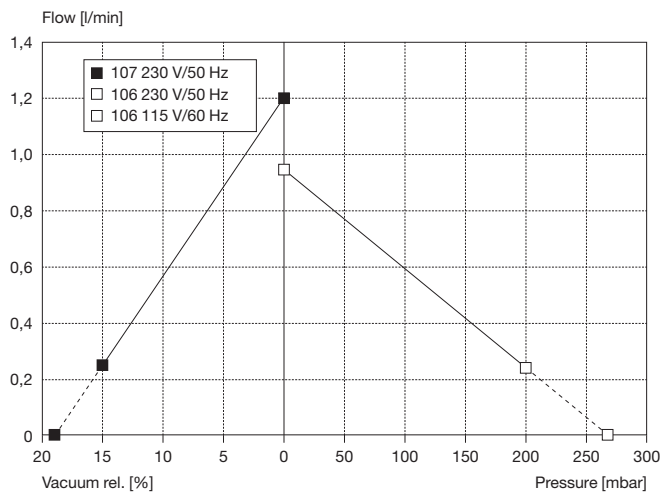

Option 10... Stock programme

Other voltages available on request.



Printed in Germany.
Art.-Nr.: 17000171 11/2010
ClimatePartner
printed climate-neutrally

Gardner Denver Thomas GmbH
Benzstraße 28 · Gewerbegebiet Nord · D-82178 Puchheim
Phone: +49 89 80900-0 · Fax: +49 89 808368
e-Mail: thomas.de@gardnerdenver.com · http://www.gd-thomas.com